


SST1 SINGLE GAS

Serviceable

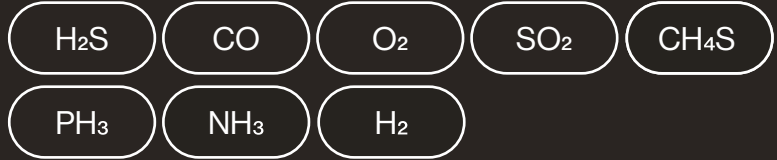

APPLICATIONS

- Oil and gas upstream
- Oil and gas downstream
- Contractors
- Site maintenance
- Turn arounds and shutdowns
- Boiler rooms
- Steel plants
- Laboratories
- Shipping
- Power generation
- Mining

FEATURES AND BENEFITS



EASY SETUP

Near Field Communication (NFC) is built in as standard and allows for a wide range of solutions depending on your needs. Simply pair with the WatchGas SST App to manage your fleet - bump, calibrate, assign or download event logs.



SENSOR

Using the latest in Solid Polymer Sensor Technology, our different target gases offer stability and reliability over extreme temperatures and conditions. With its smaller form factor and the removal of traditional Electrolyte, it is setting a new standard in the single gas market.



DISPLAY

With the largest LCD in its category, the SST1's display shows the Real Time Gas Reading, TWA and STEL alarms. This allows for the user to make quicker decisions in a gas alarm environment. Bumper screens on either side of the LCD provide anti scratch protection ensuring the clearest of readings.



RUGGED

Designed with the harshest environments in mind, the SST1 offers an Ingress Protection rating of 67-68. The casing is a double shot housing that gives extra robustness while not compromising on quality. The screen protectors located on either side of the display are to protect the LCD from scratching and is required due to its smaller sensor profile.



ALERT

As a safety device it is essential that the device clearly notifies users of the presence of gas. The SST1 has a 95dB alarm at 30 centimetres which is the industry standard and is required in loud industrial environments. High and Low alarms can be configured by the customer and automatically updated directly on the device or through the SST Dock.



SERVICEABLE

The SST1 real time monitor is a cost efficient solution for users with STEL, TWA and real time requirements. SST1 real time allows users to replace battery and sensors to maximize the lifetime of the unit. Press and hold the button for 10 seconds to reset TWA/STEL for worker shift change.

SST1 SINGLE GAS

Serviceable



The SST1 Serviceable offers one of the most cost-effective solutions on the market. With its replaceable battery and solid polymer sensor technology, the SST1 offers a compact and modular design while not compromising on its ruggedness. The SST1 Serviceable can be configured to your needs with one simple tap of the NFC to pair it with the WatchGas SST App. Monitoring for Low, High, STEL and TWA, the SST1 will indicate any immediate risks as well as long-term exposure to toxic gases

CONFIGURABLE OPTIONS

- Configuration of high and low alarm set points using SST Dock or the WatchGas SST App
- Real Time Gas reading, TWA and STEL alarms
- User settable bump test and calibration reminder
- Compliance check

SST1 SERVICEABLE SPECIFICATIONS

Size	83 × 49 × 20 mm (3.3 × 1.9 × 0.8 in)
Weight	88 g (3.1 oz)
Temperature	CO, H₂S, O₂ SO₂: -40°C to +60°C (-40°F to +140°F) / Others: -20°C to +50°C (-4°F to +122°F)
Humidity	5 ~ 95 %RH (Non-condensing)
Response time T90	H₂S, CO, O₂, PH₃ H₂ Low Range: < 10 sec CH₄S: < 40 sec SO₂, H₂ High Range: < 55 sec NH₃: < 130 sec Other sensors may vary
Battery life	O₂: 2 years H₂S, CO, SO₂, NH₃, H₂, PH₃, CH₄S: up to 3 years, dependent on gas alarms
Event logging	Last 100 events
IP	IP67-68
Communication	NFC
Shelf life	1 year
Certifications & Approvals	ATEX, IECEx, UKEX II 1 G Ex ia IIC T4 Ga I M1 Ex ia I Ma 0344 Int.Safe: CL I Dv 1, Gr A,B,C,D T4 CSA C22.2 NO. 60079-0 CAN/CSA C22.2 NO 60079 UL 61010 UL60079-0, UL60079-11 safety requirements CAN/CSA-C22.2 NO 61010-1-12 EMC Directive 2014/30/EU
Warranty	Instrument: 3 years Battery: 2 years based on 1 min of alarm per day Sensors: NH₃, CH₄S, PH₃: 1 year H₂S, CO, O₂, SO₂, H₂ Low Range, H₂ High Range: 2 years

NOTE: Battery lifetime is based on low power mode, depending on usage and functions they may be reduced.

WatchGas SST1 Serviceable DS EN 12-08-24 V1.2 © 2024 WatchGas B.V.
WatchGas is dedicated to continuously improving its products. Therefore, the specifications and features mentioned in this datasheet are subject to change without prior notice.

SENSOR SPECIFICATIONS

Sensor	Gas measuring range	Low alarm level	High alarm level	STEL	TWA	Resolution
H ₂ S	0 - 500 ppm	10 ppm	15 ppm	15 ppm	10 ppm	0.1 ppm
CO	0 - 2000 ppm	35 ppm	200 ppm	100 ppm	20 ppm	1 ppm
O ₂	0 - 25.0 % by vol.	19.5 %	23.5 %	—	—	0.1 vol%
SO ₂	0 - 100 ppm	5 ppm	10 ppm	5 ppm	2 ppm	0.1 ppm
NH ₃	0 - 100 ppm	25 ppm	50 ppm	35 ppm	25 ppm	0.1 ppm
H ₂ Low Range	0 - 1000 ppm	100 ppm	400 ppm	—	—	1 ppm
H ₂ High Range	0-20,000 ppm	4000 ppm	8000 ppm	—	—	100 ppm
CH ₄ S	0 - 100 ppm	2 ppm	5 ppm	1 ppm	0.5 ppm	0.1 ppm
PH ₃	0 - 20 ppm	1 ppm	2 ppm	1 ppm	0.3 ppm	0.01 ppm

*All alarm levels can be set using the WatchGas App

ACCESSORIES



Gas cylinder
Ask for availability



Fixed flow Regulator stainless Steel 715 0.5LPM
PN: **A0299024**
Fixed flow Regulator 715 0.5LPM (Brass)
PN: **A0195339**



WatchGas SST1 External filters
Pack of 10: **SST1-XF-10**
Pack of 100: **SST1-XF-100**



WatchGas SST Docking Station for SST1/SST4/SST4 Pumped
Touch screen PN: **SST-Dock**

FOR MORE INFORMATION

www.watchgas.com www.watchgasusa.com
info@watchgas.com info@watchgasusa.com

Distributed by